


Last revised on : 09/20/2018

SR JOB NO. SHEET

11-0V-0.5

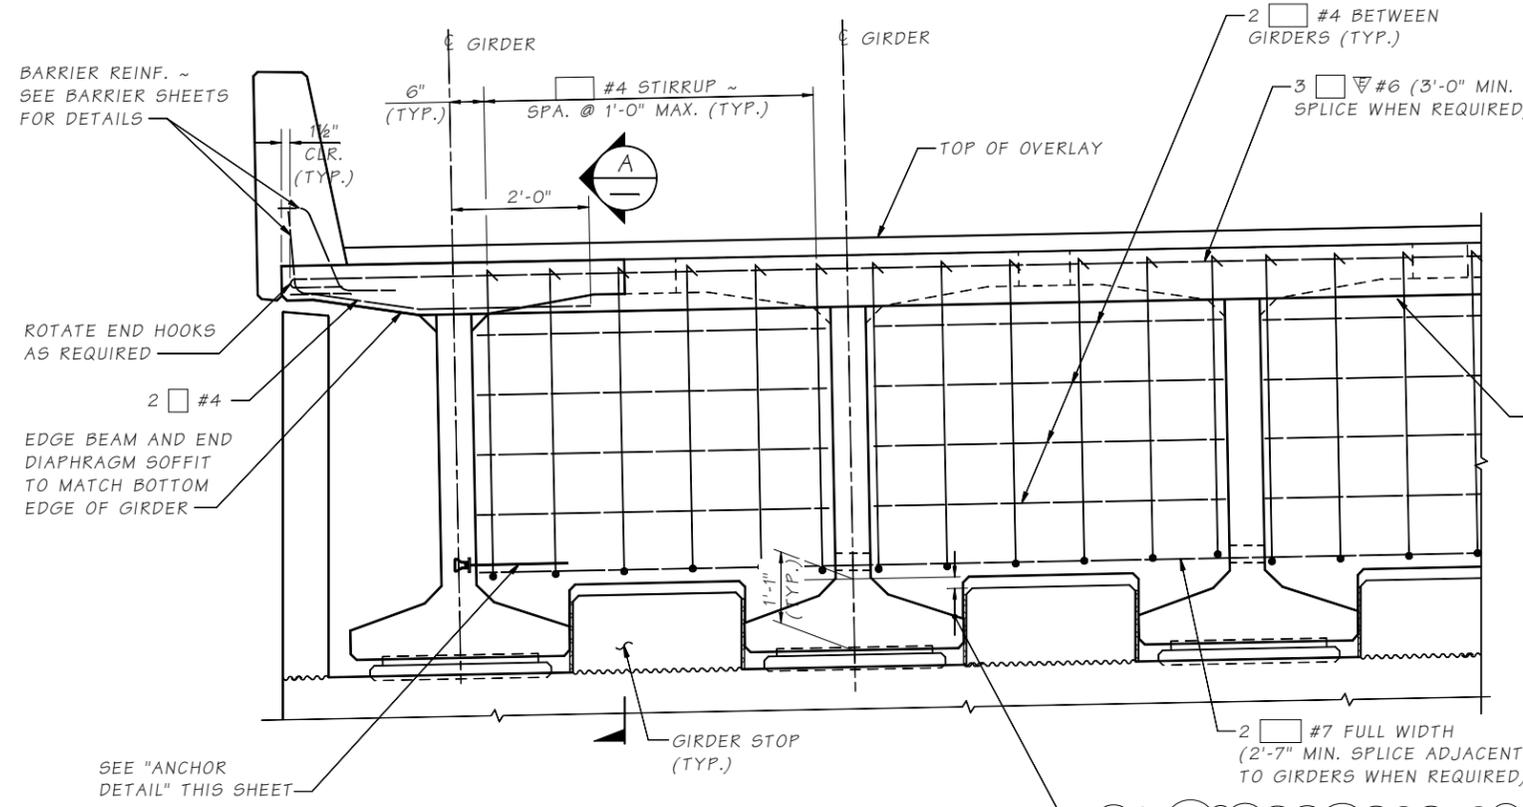


NOTE TO DETAILER:
Revise Details to show correct girder shape and girder spacing.

NOTE TO DESIGNER:
ADJUST GIRDER STOP HEIGHT TO PROVIDE 2" MIN. GAP TO BOTTOM OF DIAPHRAGM.


**ELEVATION
END DIAPHRAGM**
DIMENSIONS ARE ALONG \bar{C} DIAPHRAGM

NOTES:

1. GIRDERS SHALL BE HELD RIGIDLY IN PLACE WHEN DIAPHRAGMS ARE PLACED.
2. IT MAY BE NECESSARY TO THREAD #7 REINFORCING BARS THROUGH HOLES IN GIRDERS PRIOR TO PLACING EXTERIOR GIRDERS.
3. CUT/RELEASE GIRDER TEMPORARY STRANDS BEFORE CASTING DIAPHRAGM. SEE TEMPORARY STRAND CUTTING SEQUENCE.
4. FOR CONCRETE PLACEMENT PROCEDURE SEE CONSTRUCTION SEQUENCE SHEETS.

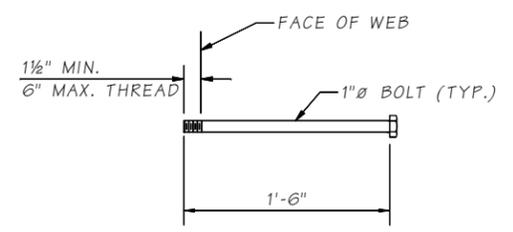

ANCHOR DETAIL
ASTM A-307

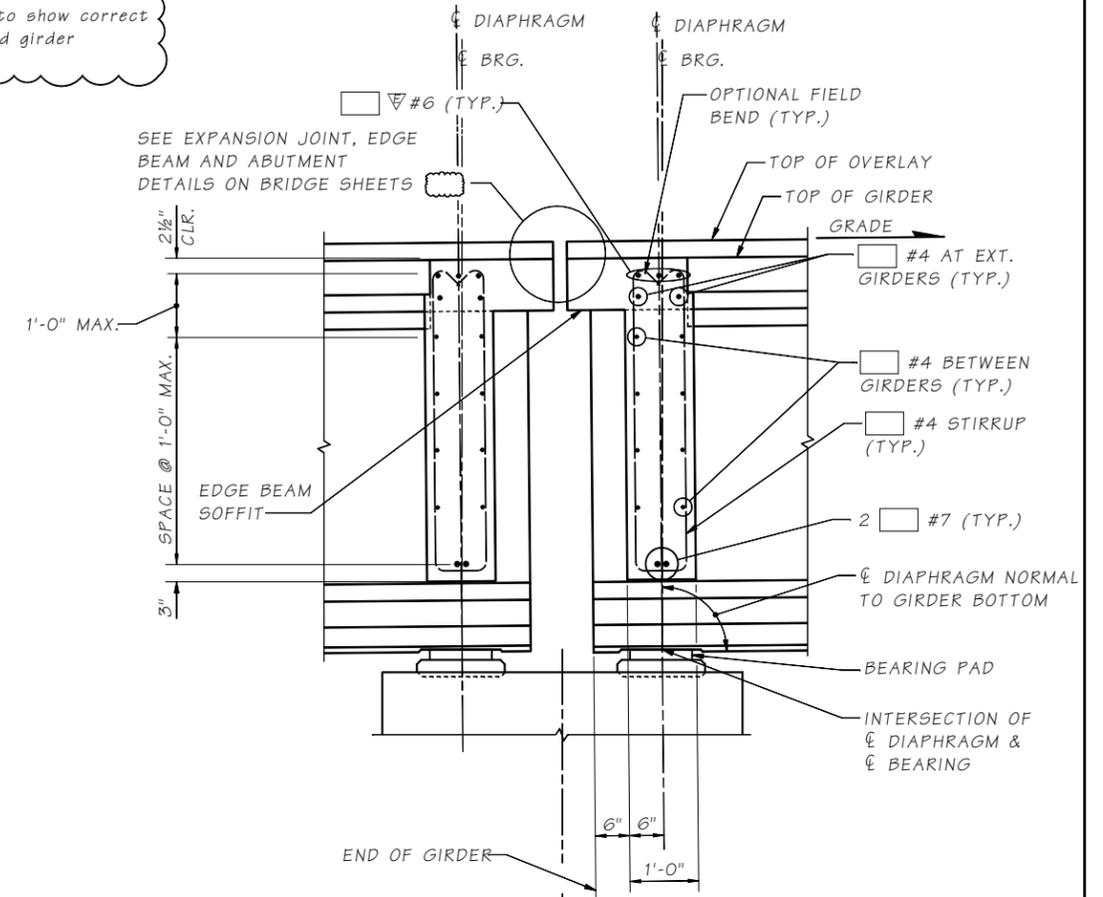

SYMM. ABOUT \bar{C} PIER (EXCEPT GRADE)

SECTION A
LONGITUDINAL DIMENSIONS ARE NORMAL TO DIAPHRAGM.
GIRDER STOP NOT SHOWN FOR CLARITY.

Bridge Design Engr.	M:\STANDARDS\Girders\WFDG\WFDG_UHPC\WFDG_UHPC_INTERMEDIATE_PIER_DIAPHRAGM.MAN							
Supervisor				REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
Designed By				10	WASH.			
Checked By				JOB NUMBER				
Detailed By								
Bridge Projects Engr.								
Prelim. Plan By								
Architect/Specialist	DATE	REVISION	BY	APPD				

Tue Nov 27 14:53:49 2018

**BRIDGE
AND
STRUCTURES
OFFICE**



WF DECK GIRDER (UHPC)
AT INTERMEDIATE PIER DETAILS

BRIDGE SHEET NO.
SHEET
OF
SHEETS